

$\frac{1}{1}$ $\frac{1}{2}$ $\frac{1}{3}$ $\frac{1}{4}$ $\frac{1}{5}$ • • •


$\frac{2}{1}$ $\frac{2}{2}$ $\frac{2}{3}$ $\frac{2}{4}$ $\frac{2}{5}$

$\frac{3}{1}$ $\frac{3}{2}$ $\frac{3}{3}$ $\frac{3}{4}$ $\frac{3}{5}$

$\frac{4}{1}$ $\frac{4}{2}$ $\frac{4}{3}$ $\frac{4}{4}$ $\frac{4}{5}$

$\frac{5}{1}$ $\frac{5}{2}$ $\frac{5}{3}$ $\frac{5}{4}$ $\frac{5}{5}$

• • •

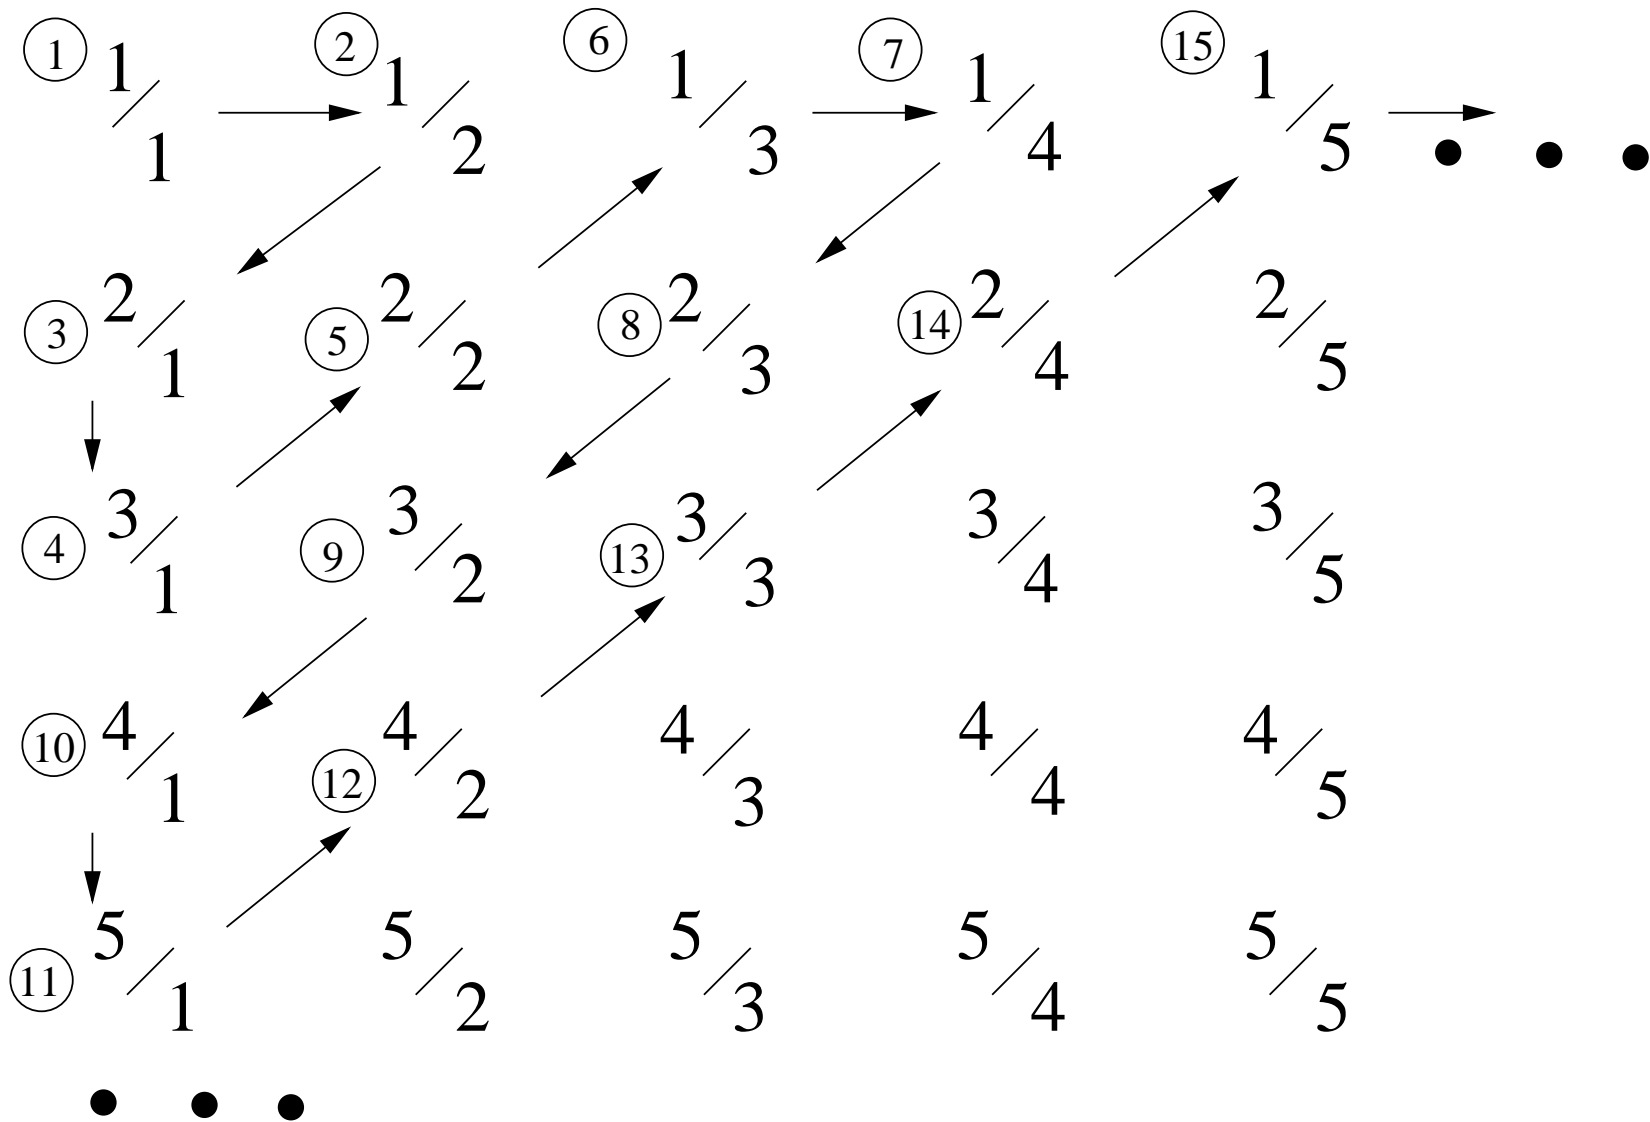

```
fun findRoom(busNum, seatNum) =  
  let  
    fun nextPair(a, b) =  
      if a = 1 andalso b mod 2 = 1 then (1, b + 1)  
      else if b = 1 andalso a mod 2 = 0 then (a + 1, 1)  
      else if (a + b) mod 2 = 1 then (a + 1, b - 1)  
      else (a - 1, b + 1);  
    fun findRoomHelper(i, currentPair) =  
      if currentPair <> (busNum, seatNum)  
      then findRoomHelper(i + 1, nextPair(currentPair))  
      else i;  
  in  
    findRoomHelper(1, (1, 1))  
  end;
```

```
fun findBusSeat(room) =
  let
    fun nextPair(a, b) =
      if a = 1 andalso b mod 2 = 1 then (1, b + 1)
      else if b = 1 andalso a mod 2 = 0 then (a + 1, 1)
      else if (a + b) mod 2 = 1 then (a + 1, b - 1)
      else (a - 1, b + 1);
    fun findBusSeatHelper(i, currentPair) =
      if i <> room
      then findBusSeatHelper(i + 1, nextPair(currentPair))
      else currentPair;
  in
    findBusSeatHelper(1, (1, 1))
  end;
```

