

Chapter 5, Binary search trees:

- ▶ Binary search trees; the balanced BST problem (spring-break eve; finished Monday)
- ▶ AVL trees (Monday and Wednesday)
- ▶ Traditional red-black trees (**Today**)
- ▶ Left-leaning red-black trees (next week Monday)
- ▶ “Wrap-up” BST (next week Wednesday)

Today:

- ▶ (Finish AVL tree performance)
- ▶ Red-black trees in context
- ▶ Definition and examples
- ▶ Codebase details
- ▶ Cases for put-fixup
- ▶ Analysis






<https://www.beyourownbirder.com>



TRADITIONAL Red-Black Trees





Image swiped from <http://www.cheeseandchickpeas.com/tomato-halloumi-salad/>


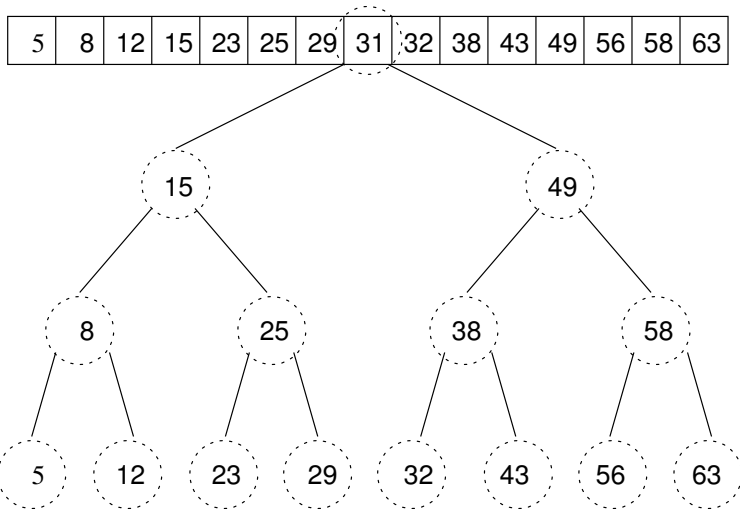


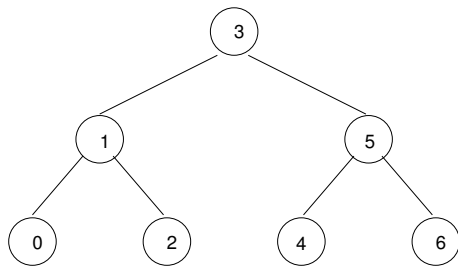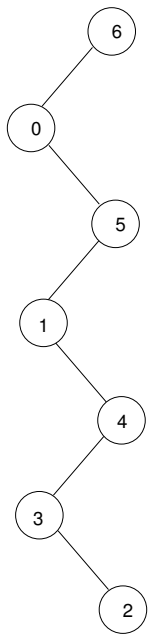

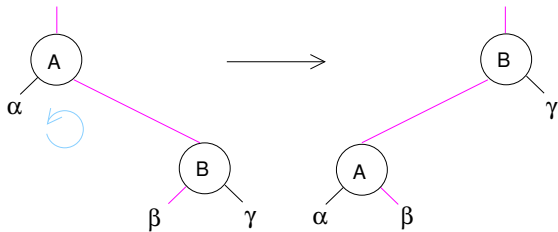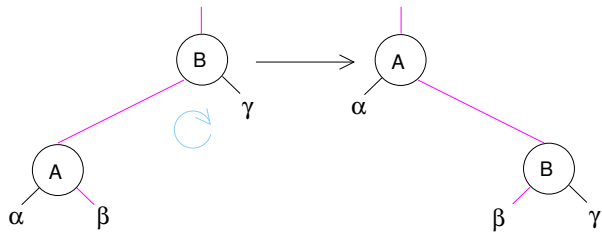




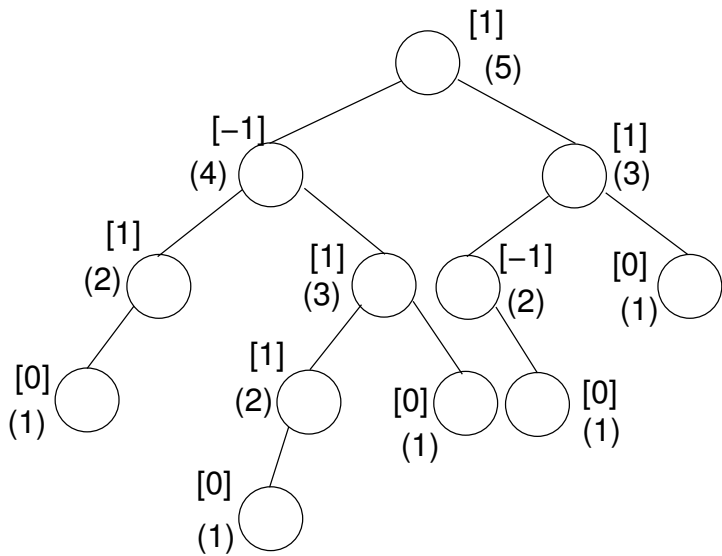




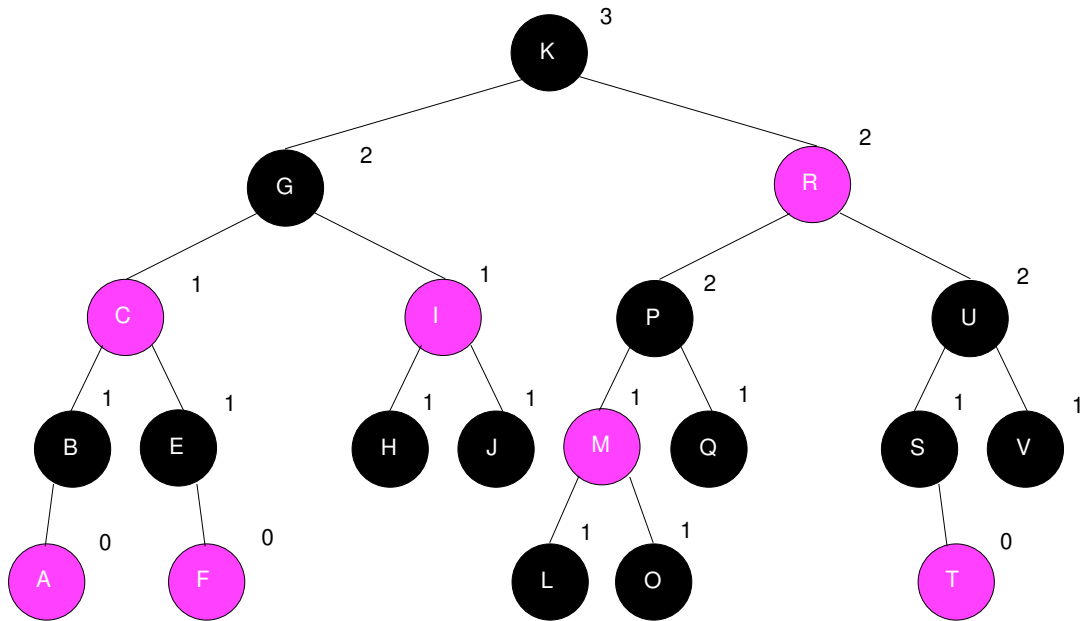


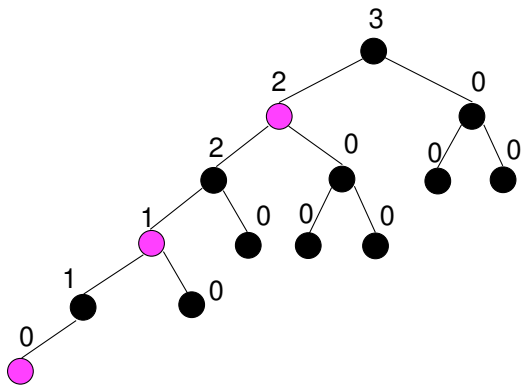


A red-black tree is a binary tree (usually a BST) that is either empty or it is rooted at node T such that

- ▶ T is either red or black.
- ▶ Both of T 's children are roots of red-black trees.
- ▶ If T is red, then both its children are black.
- ▶ The red-black trees rooted at its children have equal blackheight; moreover, the blackheight of the tree rooted at T is one more than the blackheight of its children if T is black or equal to that of its children if T is red.




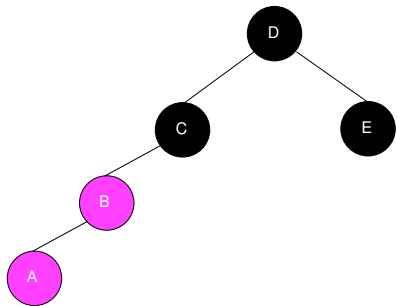


Left-Right Red Uncle

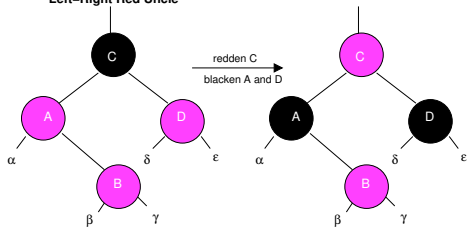


Left-Left Red Uncle

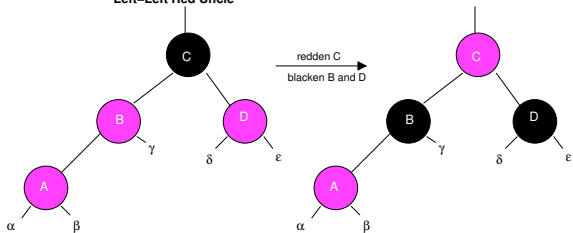


Left-Right Black Uncle




rotate left about A
fall through




rotate right about C
redden C
blacken B




Left-Right Red Uncle

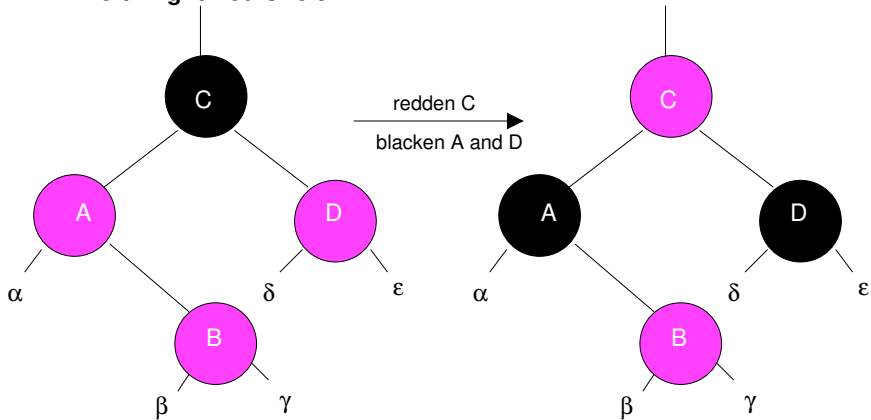

Left-Left Red Uncle

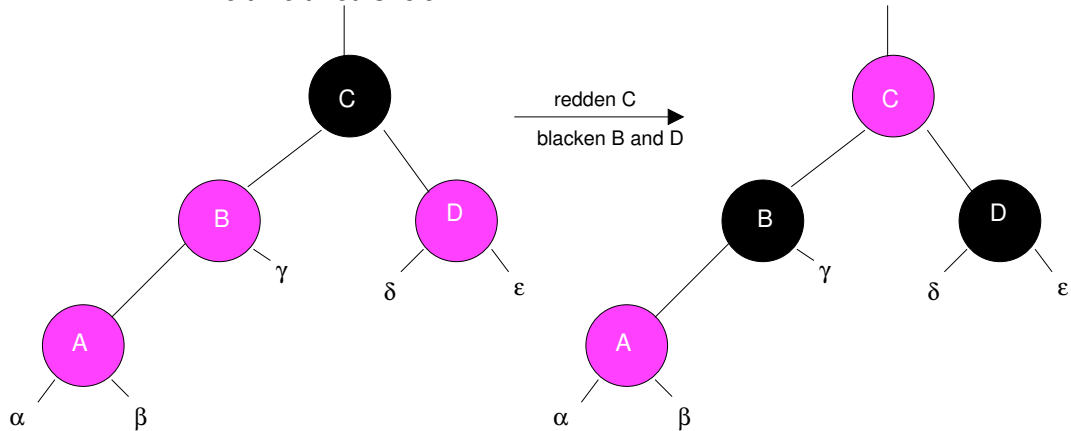


Left-Right Black Uncle




rotate left about A
fall through

Left-Left Black Uncle



rotate right about C
redden C
blacken B



Invariant 26 (Postconditions of RealNode.put() with TradRBBalancer.) Let x be the root of a subtree on which `put()` is called and let y be the node returned, that is, the root of the resulting subtree.

- (a) The subtree rooted at y has a consistent black height.
- (b) The black height of subtree rooted at y is equal to the original black height of the subtree rooted at x .
- (c) The subtree rooted at y has no double-red violations except, possibly, both y and one of its children is red.




Blackheight

1

2

3

4



Height

2

4

6

8

Nodes

2

6

14

30

AVL trees

$$h \leq 1.44 \lg n$$

The difference between the longest routes to leaves in the two subtrees is no greater than 1.

Stronger constraint, more aggressive rebalancing, more balanced tree, more work spent rebalancing.

(Traditional) red-black trees

$$h \leq 2 \lg(n + 2) - 2$$

The longest route to any leaf is no greater than twice the shortest route to any leaf.

Looser constraint, less aggressive rebalancing, less balanced tree, less work spent rebalancing.

Coming up:

Do **BST rotations** project (*suggested by this past Wed, Mar 15*)

Do **AVL** project (*suggested by Mon, Mar 20*)

Do **Traditional RB** project (*suggested by Mon, Mar 27*)

Due **Wed, Mar 22** (*end of day*) (*but spread it out*)

Read Sections 5.(4-6) [*some parts carefully, some parts skim, some parts optional—see Schoology*]

Do Exercise 5.14

Take quiz